DIRIS Digiware M

Multi-protocol communication gateways
for the DIRIS Digiware system

Bluetooth



DIRIS Digiware M-50 - ***M-70*** gateway

Function

The **DIRIS Digiware M-50** and **M-70** communication gateways are the access point for the DIRIS Digiware system, centralising the 24 VDC power supply and communication in one single point.
The **M-50** and **M-70** act as the Ethernet gateway for all the devices connected on the Digiware or RS485 bus, and integrate a web server to configure the network parameters and to remotely display measurement data.

The **M-50** and **M-70** gateways offer a wide range of functionalities, including:
- memory extension for connected devices,
- automatic export of logged consumption and data to an FTP(S) server,
- notification emails if there is an alarm on one of the connected devices (SMTPS),
- automated time synchronisation of all connected devices via SNTP.

Advantages

Plug & Play
- Direct Digiware and RS485 to Ethernet gateway.
- Automatic detection of connected devices.
- Easy configuration.
- Safety Extra Low Voltage 24 VDC power supply.

Advanced connectivity
- Ethernet output for communication using multiple protocols: Modbus TCP, BACnet IP and SNMP v1, v2, v3 (encrypted) to suit any metering and power monitoring application.
- Possible to configure as RS485 slave to communicate measurement data to a second PLC, for example.

Embedded web server
WEB-CONFIG is built in to the M-50 gateway to configure the communication architecture.
WEBVIEW-M is built in to the M-70 gateway and available without license fees to view measurements and consumption remotely.

Cyber security
The M-50 and M-70 gateways include advanced IEC 62443-compliant cyber security features to secure data transmission and reduce the risk of cyberattacks:
- customised security policy (blockage or restriction of certain protocols or services),
- secure HTTPS navigation by uploading TLS/SSL certificates,
- secure data push (FTPS, SMTPS),
- implementation of a firewall and white-list rules to guard against denial-of-service attacks.

Email notifications
The M-50/M-70 gateway can send email notifications in the event of alarms.

The solution for
- Data centre
- Healthcare
- Energy



Strong points
- Plug & Play
- Advanced connectivity
- Embedded web server
- Cyber security
- Email notifications

RJ45 (Digiware Bus) cables are available.

Conformity to standards
- IEC 62974-1 (Energy server)
- IEC 62443 (Cyber security)
- UL 61010 Guide FTRZ/PICQ File E257746
- FCC
- IC

Compatible with
- Cloud solutions

aws Microsoft Azure

Create your project
- Find the best DIRIS Digiware configuration: www.meter-selector.com

METER SELECTOR DIGITAL TOOL AVAILABLE

General characteristics

- 24 VDC power supply.
- Modbus RTU/TCP, BACnet IP, SNMP v1, v2, v3 & Traps, HTTPS, FTPS, SMTPS, SNTP, DHCP.
- Up to 32 devices (max. 196 circuits) displayed.
- Free built-in Web-based software.


M-50 and M-70 communication gateways

Application	Multi-protocol communication gateway	
		
DIRIS Digiware M	**M-50**	**M-70**
Digiware bus input	•	•
RS485	Input/output (1)	Input/output (1)
Ethernet output	•	•
Compatible protocols	Modbus RTU Modbus TCP BACnet IP SNMP v1, v2, v3, Traps	Modbus RTU Modbus TCP BACnet IP SNMP v1, v2, v3, Traps
Bluetooth	•	•
FTP(S) (automatic data export)	•	•
SMTP(S) (email notifications in case of alarm)	•	•
SNTP (time synchronisation)	•	•
Web server	WEB-CONFIG	WEBVIEW-M

(1) The gateways can be configured as Modbus master (RS485 input) or slave (RS485 output).

Architecture

MEASURE | COLLECT | VISUALISE

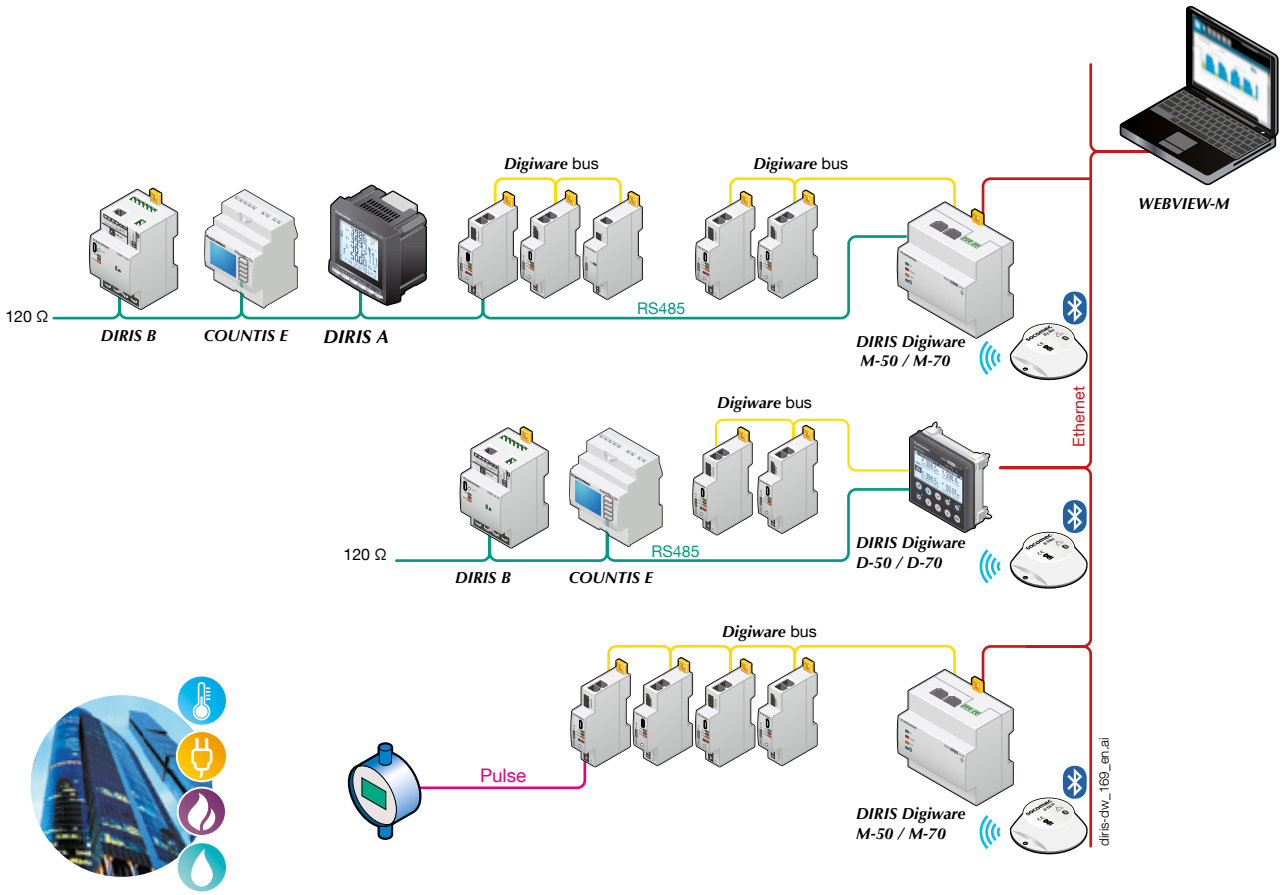


Embedded Web server

WEB-CONFIG (M-50)
The M-50 gateway includes a WEB-CONFIG enabling you to:
- Configure the device hierarchy and data access,
- Block or restrict access to specific peripherals, protocols or services.

WEBVIEW-M (M-70)
In addition to the WEB-CONFIG, the M-70 gateway enables remote viewing of data on the embedded WEBVIEW-M software, available without licence fees.
- Viewing of real-time measurements.
- Display of on-going alarms and alarm log.
- Viewing of consumption curves and load curves per load or usage.
- Photoview: displays electrical parameters on a customised background such as a site map, an electrical diagram or a panel picture to provide an overview of your electrical installation.

Data storage
These gateways extend the memory of connected devices so you can log a year's worth of measurements, load curves and consumption curves.

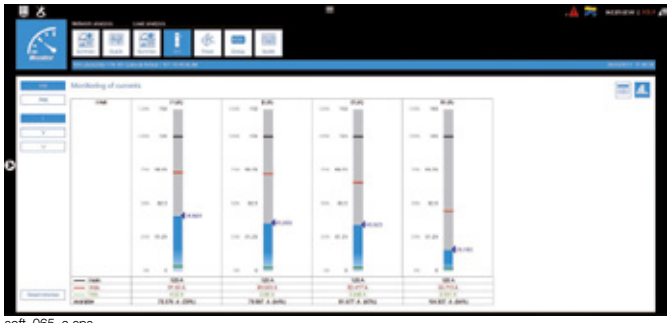
soft_065_a.eps


soft_036_a_1_fr_cat.eps


soft_064.eps

Configuration

Equipment consumption

Product	Power delivered (W)
Power supply	
P15 100-240 VAC / 24 VDC	15
P30 100-240 VAC / 24 VDC	20
Product	**Power consumed (W)**
Cables	
50-metre package	1.5
System interfaces	
DIRIS Digiware C-31	0.8
DIRIS Digiware D-50/D-70	2.5
DIRIS Digiware M-50/M-70	2.5
Voltage module	
DIRIS Digiware U-xx	0.72
DIRIS Digiware U-3xdc	0.6
Current modules	
DIRIS Digiware I-3x	0.52
DIRIS Digiware I-4x	1.125
DIRIS Digiware I-6x	0.7
DIRIS Digiware I-3xdc (+ 3 DC current sensors)	2
DIRIS Digiware S-xx	0.35
Input/output modules	
DIRIS Digiware IO-10/IO-20	0.5
Repeater	
DIRIS Digiware C-32	1.5
Residual current monitoring module	
DIRIS Digiware R-60	0,5

Calculation rules for the max. number of devices on the Digiware bus

The total power consumed by the equipment connected to the Digiware bus must not exceed the power delivered by 24 VDC.
The power supply must not exceed 20 W / 70 °C or 27 W / 40 °C.

Configuration with P15 power supply (ref: 4829 0120) delivering 15 W

For example, it is possible to use
- 1 DIRIS Digiware M-50 gateway (2.5 W)
- 1 DIRIS Digiware voltage module U-xx (0.72 W)
- 50 metres of cable (1.5 W)

and
- 29 DIRIS Digiware S-xx current modules (29 x 0.35 = 10.15 W)
  ➪ **Total power = 14.87 W**

or
- 9 DIRIS Digiware I-4x current modules (9 x 1.125 = 10.125 W)
  ➪ **Total power = 14.845 W.**

Configuration with a 24 VDC power supply delivering a maximum of 20 W (P30 ref. 4729 0603)


For example, it is possible to use
- 1 DIRIS Digiware M-50 gateway (2.5 W)
- 1 DIRIS Digiware voltage module U-xx (0.72 W)
- 50 metres of cable (1.5 W)

and
- 29 DIRIS Digiware I-3x current modules (30 x 0.52 = 15.08 W)
  ➪ **Total power = 19.8 W**

or
- 14 DIRIS Digiware I-4x current modules (13 x 1.125 = 15.72 W)
  ➪ **Total power = 19.345 W.**

Repeater


With power consumptions higher than 20 W or distances greater than 100 m, a DIRIS Digiware C-32 repeater is required.
In a DIRIS Digiware system, a maximum of 2 repeaters may be used.

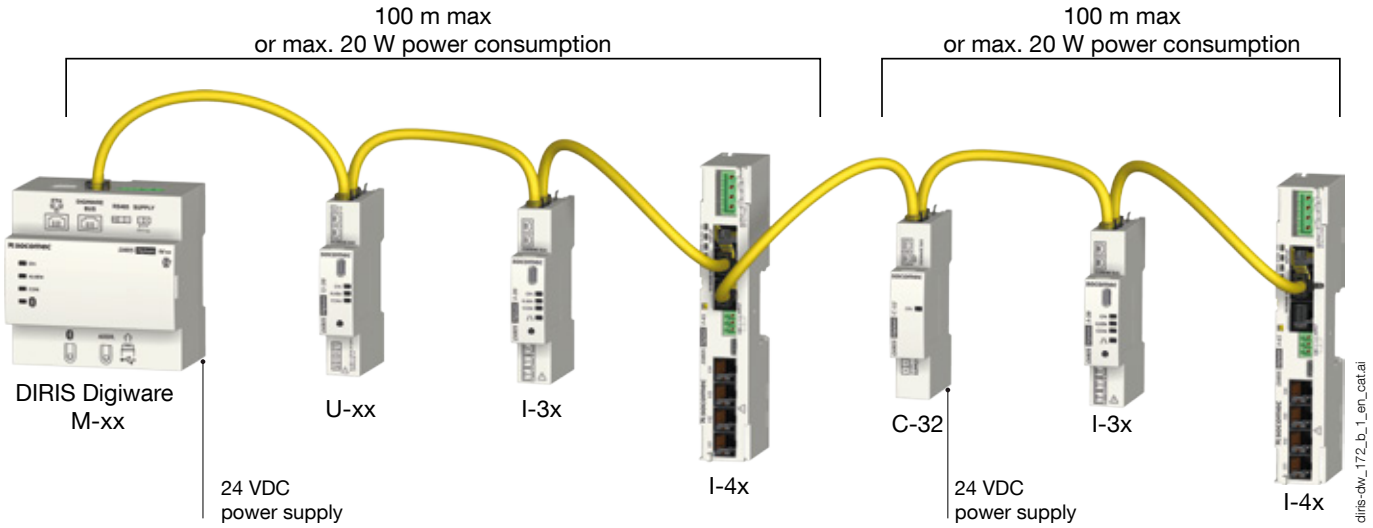

DIRIS Digiware M

Multi-protocol communication gateways
for the DIRIS Digiware system

Dimensions (in/mm)

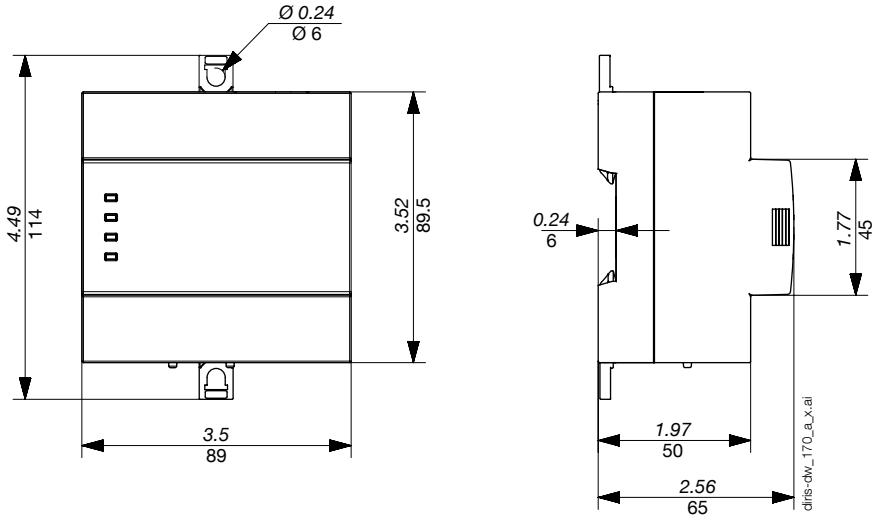

Technical characteristics

Electrical characteristics	
Power supply	24 VDC ±10% - 20 W max
Consumption	2.5 W
Battery life	10 years
Mechanical characteristics	
Case type	Modular for DIN-rail and backplate mounting
Weight	166 g
Ingress Protection rating	IP40 front face in modular assembly
Environmental characteristics	
Ambient operating temperature	-10 … +55 °C
Storage temperature	-25 … +70 °C
Operating humidity	95% at 40 °C
Operating altitude	< 2000 m
Communication characteristics	
Ethernet RJ45 10/100 Mbps	Gateway function (M-50/M-70): Modbus TCP BACnet IP SNMP v1, v2, v3, Traps
Digiware bus	
Function	2 … 3 fils half duplex
Cable type	Specific Socomec cable with RJ45 connection
RS485	
Link type	24 VDC +10% / -20%
Protocol	Modbus RTU
Speed	9600 bds (max. 10 devices) 38400 bds - 115200 bds (max. 32 devices)
Function	Communication with PMD and meters or energy management systems (in RS485 slave mode)
USB	
Protocol	Modbus RTU over USB
Function	Configuration of gateway and connected PMDs/meters

References

DIRIS Digiware		Reference
M-50	Multi-protocol Ethernet gateway	4829 **0219**
M-70	Multi-protocol Ethernet gateway with embedded WEBVIEW-M web server	4829 **0220**
M-50 Bluetooth	Multi-protocol Ethernet gateway (with Bluetooth connectivity)	4829 **0221**
M-70 Bluetooth	Multi-protocol Ethernet gateway with embedded WEBVIEW-M web server (with Bluetooth connectivity)	4829 **0222**
Power supply		**Reference**
P15	Power supply 100-240 VAC/ 24 VDC 15 W	4829 **0120**
P30	Power supply 100-240 VAC / 24 VDC 20 W	4729 **0603**
Digiware connection cables		**Reference**
RJ45 cables for Digiware Bus	Length 0.06 m	4829 **0189**
	Length 0.10 m	4829 **0181**
	Length 0.20 m	4829 **0188**
	Length 0.50 m	4829 **0182**
	Length 1 m	4829 **0183**
	Length 2 m	4829 **0184**
	Length 3 m	4829 **0190**
	Length 5 m	4829 **0186**
	Length 10 m	4829 **0187**
	50 m reel + 100 connectors	4829 **0185**
Terminal for Digiware bus (included with the M-xx displays)		4829 **0180**
USB configuration cable		4829 **0050**

Accessories	Available for order in multiples of	Reference
Fused disconnect switches to protect voltage inputs (RM type) 1 pole + neutral	6	5701 **0017**
Fused disconnect switches to protect voltage inputs (RM type) 1 pole + neutral	12	5701 **5005**
0.5 A 10x38 gG fuses	10	6012 **0000**
2 A protect Mxx P-15 10x38 gG fuses 1	10	6012 **0002**

Expert Services

EXPERT SERVICES

Require commissioning onto your network?
No problem for our “Expert Services” team. They will fully commission all your SOCOMEC devices, audit your system and train your staff on its use.

For further information, please contact your nearest SOCOMEC branch.