


13094006

Bridging bar 4P for ATyS M 40-125A



Link to the reference

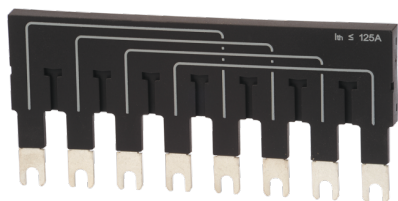

<https://emea.socomec.com/en/reference/13094006>

Used to bridge the outgoing common connection between switch I and switch II. The bridging bar does not reduce the connection capacity of the cage terminals.

Classification

UNSPSC	39122205
ETIM Class	EC002498
IGCC	5177

Commerce

Effective date	2006-03-31
Offer Life Cycle Code	40
Country of origin	DE

Environmental impact

Carbon footprint - Lifecycle total [kg CO ₂ eq.]	74
Carbon footprint - Manufacturing [A1-A3] [kg CO ₂ eq.]	2

ETIM - Technical features

Type of accessory/spare part	Connecting bridge
Accessory	Yes
Spare part	No

Logistics

GTIN/EAN	3596031823956
Customs number	8538909999
Price unit	PC
Weight of the packing unit [kg]	0.35
Length of the packing unit [m]	0.013
Width of the packing unit [m]	0.09
Depth of the packing unit [m]	0.2

Technical Characteristics

Weight [kg]	0.35
Number of poles	4
Rated current [A]	40..125
Type	N/A
Suitable with frame size	ATyS M