

OIL-FILLED

from 100 to 2500 kVA with
insulation cl. < 24 kV
Losses Eo - Bk according to
IEC EN 50464-1

GENERAL INFORMATION

At present, the improvement of the energy efficiency cannot be considered a slogan anymore, but a need of our time. Eo-Bk series high efficiency transformers are created for this purpose guaranteeing:

- savings in operating costs of the plant, due to low values of losses.
- consumption reduction of energy resources.
- reduction of CO₂ emissions



ANNUAL SAVINGS (MAXIMUM) COMPARED TO TRANSFORMERS WITH NORMAL LOSSES

RATED POWER kVA	50	100	160	250	400	630	800	1000	1250	1600	2000	2500
LOW CONSUMPTION MWh	5,5	9,2	14,4	20,1	28,3	39,9	42,9	43,8	44,7	56,9	72,8	82,3
LOW EMISSIONS CO ₂ (TON)	4,1	6,9	10,8	15,1	21,2	29,9	32,2	32,9	33,5	42,7	54,6	61,8
ENERGY SAVINGS TOE*	1,0	1,7	2,7	3,8	5,3	7,5	8,0	8,2	8,4	10,6	13,6	15,4

* TON OF OIL EQUIVALENT

PARTICULARITIES OF AN OIL-FILLED TRANSFORMER

The extreme flexibility of the heat reducing waves present on the transformer tank, allows to compensate the volume increases of the insulating fluid related to its operating temperature.

The leak-proofness of the transformer tank prevents the absorption of humidity, making it "Maintenance free".

Reference Norms :

- CEI EN 60067-1 to 10
- CEI EN 50464-1
- The phases of design and building, in addition to their compliance with IEC EN norms, take into account the following rules:
- ISO 9001 : 2008 regarding the quality standards and procedures.
- ISO 14001 : 2004 regarding the environmental issues.

We, as a manufacturer, guarantee the use of PCB free insulating fluids. The magnetic core is built of grain-oriented electrical steel sheets and they use the step lap technique for their cut and assembly to reduce the abnormal overheating risks and to decrease the noise. The coils are designed and built so that the transformer may operate on full-load conditions in strict compliance with A thermal class.

Note: on request, we may provide transformers with the same electrical features but with a conservator.

DESCRIPTION

The oil-filled distribution transformers have the following features

- Cooling ONAN.
- They may be installed either inside or outside.
- Anti-corrosion surface treatment.
- Suitable for heavy working conditions.
- Tested according to IEC 60296 standards.



PROVIDED STANDARD ACCESSORIES

- Bushings for MV and LV connections.
- Primary voltage regulator with 5 positions installed on the tank.
- Rating plate.
- Lifting lugs.
- 2 Earthing points.
- 4 Bi-directional flat rollers.
- Filling valve.
- Drain valve according to IEC EN 50216-4.

RATED POWER kVA		50	100	160	250	400	630	800	1000	1250	1600	2000	2500
NO-LOAD LOSSES	W	190	320	460	650	930	1.200	1.400	1.700	2.100	2.600	3.100	3.500
LOAD LOSSES AT 75 °C	W	875	1.475	2.000	2.750	3.850	5.600	7.000	9.000	11.000	14.000	18.000	22.000
NO-LOAD CURRENT I _o	%	1	0,9	0,6	0,6	0,6	0,6	0,6	0,6	0,6	0,4	0,4	0,4
SHORT CIRCUIT VOLTAGE V _{CC}	%	4	4	4	4	4	6	6	6	6	6	6	6
INPUT CURRENT I _{E/IN}		11,6	10,6	10,10	9,2	9,4	9	8,4	8,4	8,8	8	7,6	7,5

OUTPUT AT 75°C

COSφ 1 100% LOAD	%	97,91	98,24	98,49	98,66	98,82	98,93	98,96	98,94	98,96	98,97	98,96	98,99
COSφ 1 75% LOAD	%	98,21	98,49	98,70	98,84	98,98	99,09	99,12	99,11	99,12	99,13	99,13	99,16
COSφ 0,9 100% LOAD	%	97,69	98,04	98,32	98,51	98,69	98,81	98,85	98,83	98,85	98,83	98,84	98,88
COSφ 0,9 75% LOAD	%	98,02	98,33	98,55	98,71	98,87	98,99	99,02	99,01	99,03	99,02	99,03	99,07

VOLTAGE DROP AT 75° C

COSφ 1 100% LOAD	%	1,81	1,54	1,32	1,17	1,04	1,06	1,05	1,08	1,05	1,05	1,08	1,06
COSφ 0,9 100% LOAD	%	3,17	2,98	2,82	2,71	2,61	3,51	3,5	3,52	3,5	3,5	3,52	3,50





NOISE

SOUND POWER LEVEL (L _{wa})	dB(A)	55	59	62	65	68	70	71	73	74	76	78	81
--------------------------------------	-------	----	----	----	----	----	----	----	----	----	----	----	----

SIZES AND WEIGHTS (APPROXIMATE)

Hermetically Sealed Transformer

Transformer with conservator

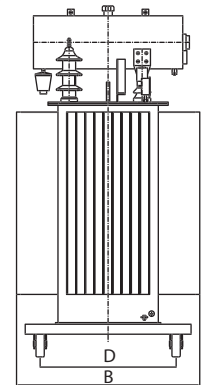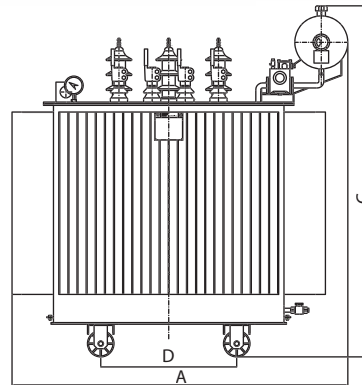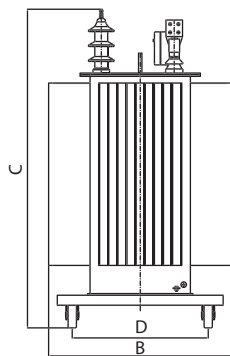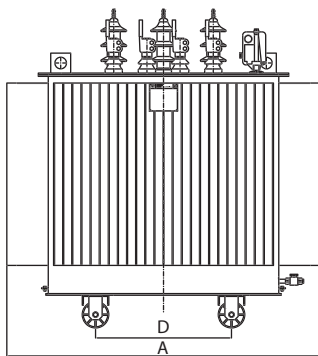

HERMETICALLY SEALED TRANSFORMER		50	100	160	250	400	630	800	1000	1250	1600	2000	2500
LENGTH (A)	mm	850	1.000	1.050	1.150	1.250	1.550	1.600	1.700	1.800	1.900	2.100	2.200
DEPTH (B)	mm	500	600	600	700	700	900	900	1.000	1.100	1.200	1.200	1.200
HEIGHT (C)	mm	900	900	1.000	1.200	1.300	1.400	1.500	1.500	1.500	1.600	1.900	1.950
WHEEL INTERAXIS (D)	mm	400	520	520	520	670	670	820	820	820	820	1.000	1.000
WHEEL DIAMETER	mm	150	150	150	150	150	150	150	150	150	150	150	150
OIL WEIGHT	kg	90	130	170	230	270	430	520	580	610	730	930	1.000
TOTAL WEIGHT	kg	460	585	750	1.100	1.375	1.910	2.300	2.600	2.900	3.650	4.300	5.100

TRANSFORMER WITH CONSERVATOR		50	100	160	250	400	630	800	1000	1250	1600	2000	2500
LENGTH (A)	mm	850	1.000	1.050	1.150	1.250	1.550	1.600	1.700	1.800	1.900	2.100	2.200
DEPTH (B)	mm	500	600	600	700	700	900	900	1.000	1.100	1.200	1.200	1.200
HEIGHT (C)	mm	1.000	1.000	1.080	1.320	1.400	1.500	1.720	1.820	1.700	1.800	2.100	2.100
WHEEL INTERAXIS (D)	mm	400	520	520	520	670	670	820	820	820	820	1.000	1.000
WHEEL DIAMETER	mm	150	150	150	150	150	150	150	150	150	150	150	150
OIL WEIGHT	kg	90	130	170	240	280	440	530	590	625	745	950	1.020
TOTAL WEIGHT	kg	465	595	765	1.115	1.395	1.930	2.320	2.620	2.930	3.680	4.350	5.100