


39990701

Auxiliary contact U type 160A-1250A 1 NO

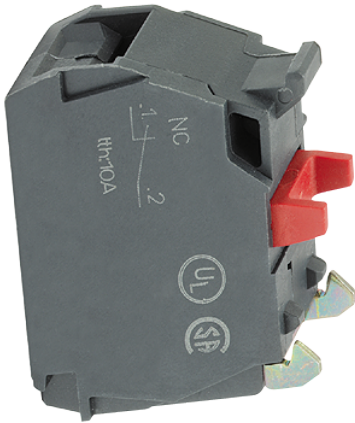

General characteristics

- Connection to the control circuit: 6.35 mm FASTON terminal.
- Electrical characteristics: 30,000 operations.

Link to the reference



<https://emea.socomec.com/en/reference/39990701>

Pre-break and position 0 and I signalling by 1 or 2 NO/NC auxiliary contacts.

Classification

UNSPSC	39122233
ETIM Class	EC000041
IGCC	5291

Commerce

Effective date	1998-06-12
Offer Life Cycle Code	40
Country of origin	FR

ETIM - Electrical characteristics

Number of contacts as normally open contact	1
Rated operation current Ie at AC-15, 230 V [A]	3

ETIM - Mechanical characteristics

Type of electric connection	Screw connection
Mounting method	Front fastening

Logistics

GTIN/EAN	3596031196050
Customs number	8536500700
Price unit	PC
Weight of the packing unit [kg]	0.01
Length of the packing unit [m]	0.06
Width of the packing unit [m]	0.06
Depth of the packing unit [m]	0.01

Technical Characteristics

Weight [kg]	0.01
Number change-over contacts	1
Number NC contacts	1
Number NO contacts	1
Type	Auxiliary contact U type NC