
44390001

1st auxiliary contact pre-break N position NO/NC SIRCO VM1 63-125A

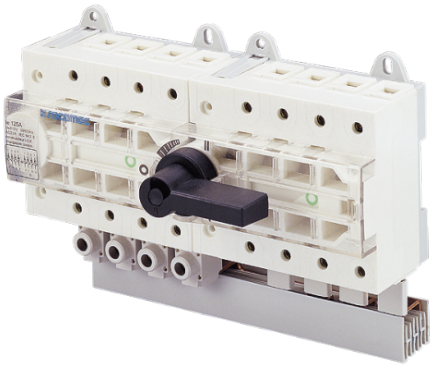

Pre-breaking and signalling of positions I and II: 1 NO/NC auxiliary contact for each position.

General characteristics

- Snaps on and is secured by a screw.
- Connector block with a maximum capacity of up to 2 x 1.5 mm2 per terminal.

Link to the reference

https://emea.socomec.com/en/reference/44390001

Classification

UNSPSC	39122205
ETIM Class	EC000041
IGCC	5177

Commerce

Effective date	1999-12-01
Offer Life Cycle Code	40
Country of origin	MA

ETIM - Electrical characteristics

Number of contacts as normally open contact	1
Number of contacts as normally closed contact	1

ETIM - Mechanical characteristics

Type of electric connection	Screw connection
Mounting method	Side mounting

ETIM - Technical features

Lamp holder	None

Logistics

GTIN/EAN	3596031221622
Customs number	8536500700
Price unit	PC
Weight of the packing unit [kg]	0.03
Length of the packing unit [m]	0.11
Width of the packing unit [m]	0.147
Depth of the packing unit [m]	0.25

Norms

Conformity to standards	IEC

Technical Characteristics

Weight [kg]	0.03
Number change-over contacts	1
Number NC contacts	1
Number NO contacts	1
Type	Pre-break auxiliary contact NO/NC I-0-II for Sirco VM1 63A-125A