
**54003240**

# Terminal lug 45Nm 20mm 3P 400A

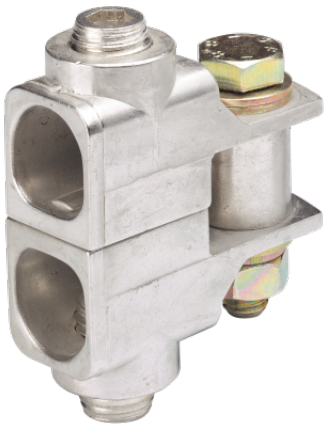

SOCOMEC cage terminals are connection accessories that can be fixed onto the power terminals of SOCOMEC load break switches, changeover switches and fuse combination switches. They enable a direct terminal-free connection to rigid copper and aluminium conductors, with integration under the IP2 protective cover

## General characteristics

- Ratings: 160 to 630 A.
- Number of poles: 3 and 4.
- Material: tin-plated aluminium.

## Compliance with standards

- IEC 60947-1 (if mounted to Socomec devices)
- NF C 63-060
- NF C 63-062

## Link to the reference

https://emea.socomec.com/en/reference/54003240

## Classification

| | |
|---|---|
| UNSPSC | 39121421 |
| ETIM Class | EC002498 |
| IGCC | 4586 |

## Commerce

| | |
|---|---|
| Effective date | 1993-06-08 |
| Offer Life Cycle Code | 40 |
| Country of origin | FR |

## ETIM - Technical features

| | |
|---|---|
| Type of accessory/spare part | Connection terminal |
| Accessory | Yes |
| Spare part | No |

## Logistics

| | |
|---|---|
| GTIN/EAN | 3596031346882 |
| Customs number | 8536901000 |
| Price unit | PC |
| Weight of the packing unit [kg] | 1.011 |
| Length of the packing unit [m] | 0.075 |
| Width of the packing unit [m] | 0.035 |
| Depth of the packing unit [m] | 0.03 |

## Norms

| | |
|---|---|
| Conformity to standards | IEC |

## Technical Characteristics

| | |
|---|---|
| Height [mm] | 38 |
| Width [mm] | 32 |
| Depth [mm] | 143 |
| Weight [kg] | 1.011 |
| Number of conductors | 2 |
| Number of poles | 3 |
| Rated current [A] | 400 |
| Section | 16..185 mm² |