
54113040

TERMINAL DISTRIBUTION BLOCK FOR SIRCO 3 POLES 400 A

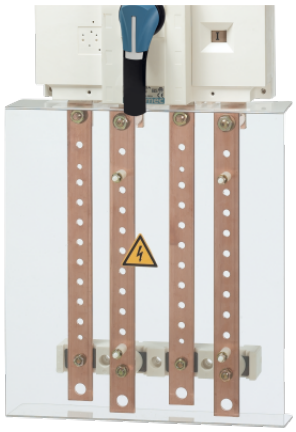

SOCOMEC distribution blocks make it easy to connect conductors. They are mounted downstream of a load break switch, a changeover switch, a fuse switch or any protection device on the market.

Strong points
- Extensive range
- Easy integration

General characteristics
- Lug connection.

Compliance with standards
- IEC 60947-3

Link to the reference

https://emea.socomec.com/en/reference/54113040

Classification

UNSPSC	39121421
ETIM Class	EC000276
IGCC	4586

Commerce

Effective date	1996-09-04
Offer Life Cycle Code	40
Country of origin	FR

ETIM - Mechanical characteristics

Number of poles	3
With seal head	No

Logistics

GTIN/EAN	3596031347193
Customs number	8536901000
Price unit	PC
Weight of the packing unit [kg]	3.09
Length of the packing unit [m]	0.53
Width of the packing unit [m]	0.29
Depth of the packing unit [m]	0.07

Norms

Conformity to standards	IEC

Technical Characteristics

Height [mm]	491
Width [mm]	281
Depth [mm]	116
Number of conductors	9
Number of poles	3
Rated current [A]	400