


50247300

Busbar support SB C 20 3P x2

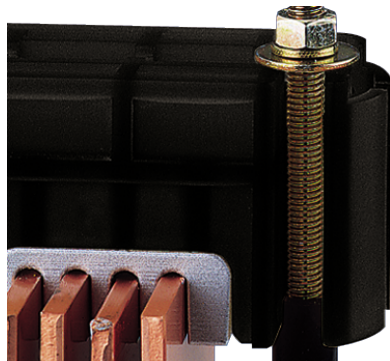

Strong points

- Insulating materials
- Durability
- Easy to use
- Extensive range

General characteristics

- High dielectric strength.
- High mechanical resistance.
- Non-magnetism of assembly parts.
- High resistance to damp heat (supplied "tropicalised").

Compliance with standards

- IEC 61439-1
- IEC 60865-1

Link to the reference



<https://emea.socomec.com/en/reference/50247300>

With SOCOMEC's insulating bar supports you can:

- mount and attach the busbars inside the electrical panel,
- cope with the forces experienced by the busbars during a short circuit.

Classification

UNSPSC	39121321
ETIM Class	EC001166
IGCC	4462

Commerce

Effective date	1999-01-01
Offer Life Cycle Code	40
Country of origin	FR

ETIM - Electrical characteristics

Number of poles	3
-----------------	---

ETIM - Mechanical characteristics

Busbar distance [mm]	110
----------------------	-----

Logistics

GTIN/EAN	3596031236084
Customs number	8547200000
Price unit	PC
Weight of the packing unit [kg]	2.69
Length of the packing unit [m]	0.385
Width of the packing unit [m]	0.08
Depth of the packing unit [m]	0.056

Norms

Conformity to standards	IEC
-------------------------	-----

Technical Characteristics

Weight [kg]	2.69
Busbar distance	110
Number of poles	3
Rated voltage	1000 Vac
Section	2x10