


84990001

Auxiliary contact screw position NO/NC INOSYS

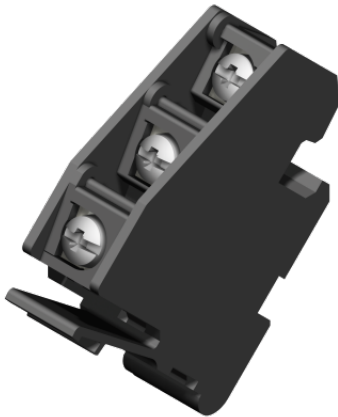

Used to monitor the position of the load break switch or to give the information of prebreaking.
The same auxiliary contact can be used to provide position and tripping information.
The function of the auxiliary contact depends on where it is mounted on the mechanism.

Link to the reference



<https://emea.socomec.com/en/reference/84990001>

Classification

UNSPSC	39122233
ETIM Class	EC000041
IGCC	5290

Commerce

Effective date	2015-02-13
Offer Life Cycle Code	40
Country of origin	TN

Logistics

GTIN/EAN	3596032886721
Customs number	8536500700
Price unit	PC
Weight of the packing unit [kg]	0.02
Length of the packing unit [m]	0.042
Width of the packing unit [m]	0.04
Depth of the packing unit [m]	0.015

Technical Characteristics

Weight [kg]	0.02
Number change-over contacts	1
Number NC contacts	1
Number NO contacts	1
Type	AUXILIARY CONTACT NO+NC INOSYS