

KKM	Three–phase oil–immersed hermetically sealed earthing transformer with auxiliary winding 50kVA, 10,5±2x2.5%/0.41kV, ZNyn11+I, 50A	Offer No. P26–018 Drawing No. MS–2680 Version 1.0 Page 3 of 3

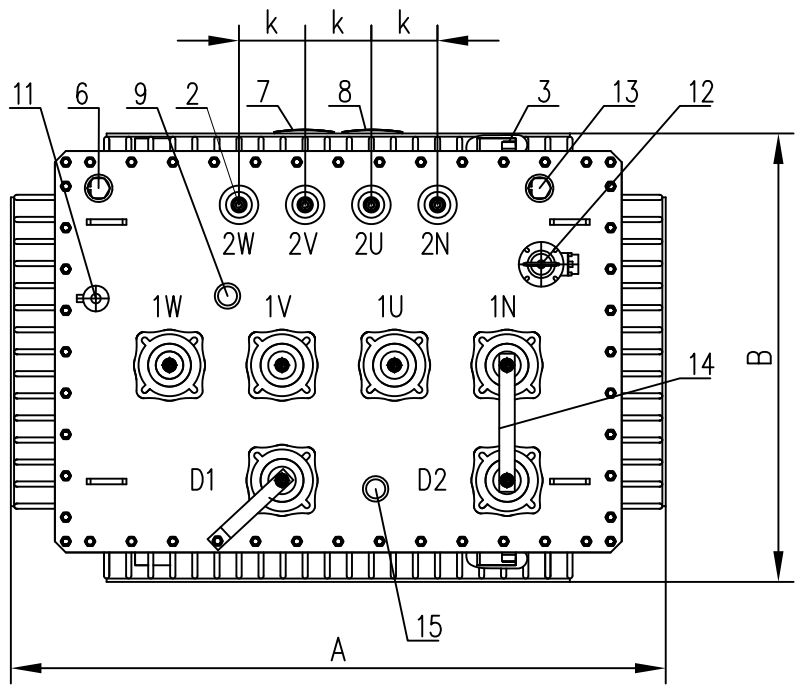

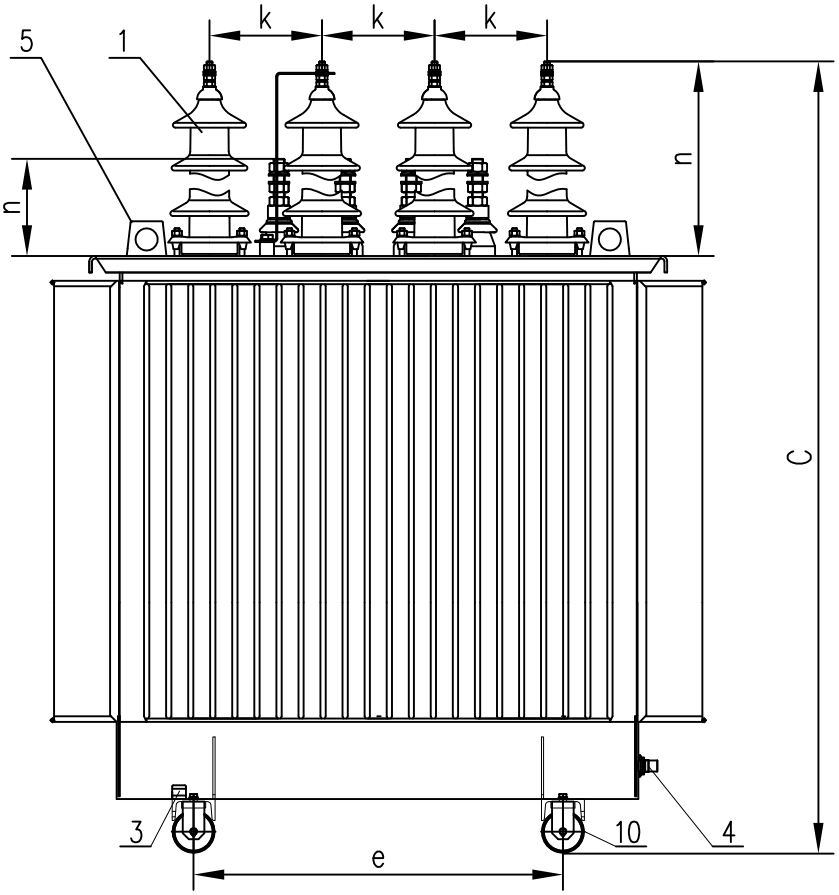

1. H.V. Bushings EN 50180 12kV, 250A
2. L.V. Bushings EN 50386 1kV, 250A
3. Earthing terminal
4. Oil drain valve
5. Lifting lugs
6. Filling hole
7. Diagram plate
8. Rated plate
9. Transformer tap changer
10. Bi–directional wheels
11. Contact thermometer
12. Pressure relief device with changeover contacts
13. Oil level inicator
14. Removable bushbar
15. Reactor tap changer

kVA	A	B	C	e	k		n		Mass(kg)		CNT 50–10,5–50
					H.V.	L.V.	H.V.	L.V.	Oil	Total	
50	1250	1200	1480	520	–	–	275	125	595	1980	