


50245300

Busbar support SB C 30 10mm 3P

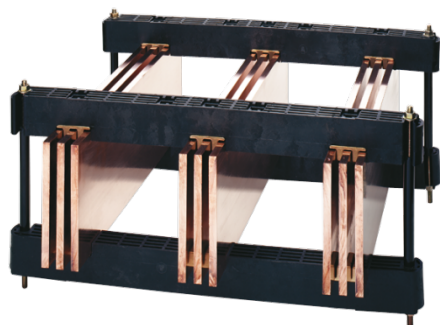

Strong points

- Insulating materials
- Durability
- Easy to use
- Extensive range

General characteristics

- High dielectric strength.
- High mechanical resistance.
- Non-magnetism of assembly parts.
- High resistance to damp heat (supplied "tropicalised").

Compliance with standards

- IEC 61439-1
- IEC 60865-1

Link to the reference



<https://emea.socomec.com/en/reference/50245300>

With SOCOMEC's insulating bar supports you can:

- mount and attach the busbars inside the electrical panel,
- cope with the forces experienced by the busbars during a short circuit.

Classification

UNSPSC	39121321
ETIM Class	EC001166
IGCC	4462

Commerce

Effective date	1999-01-01
Offer Life Cycle Code	40
Country of origin	FR

ETIM - Electrical characteristics

Number of poles	3
Max. rated current [A]	7000

ETIM - Mechanical characteristics

Busbar distance [mm]	185
----------------------	-----

Logistics

GTIN/EAN	3596031235728
Customs number	8547200000
Price unit	PC
Weight of the packing unit [kg]	2.999
Length of the packing unit [m]	0.565
Width of the packing unit [m]	0.08
Depth of the packing unit [m]	0.055

Norms

Conformity to standards	IEC
-------------------------	-----

Technical Characteristics

Weight [kg]	2.999
Busbar distance	185
Number of poles	3
Rated voltage	1000 Vac
Section	3x10