


50230410

Busbar support SB P 30 50-80mm 4P 1000A

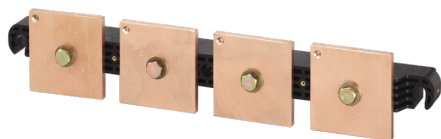

The insulating bar supports ensure secure mounting of the busbars in the electrical panel.

Strong points

- Space saving

General characteristics

- High dielectric strength.
- High mechanical resistance.
- Non-magnetism of assembly parts.
- High resistance to damp heat (supplied "tropicalised").

Compliance with standards

- IEC 61439-1
- IEC 60865-1

Link to the reference



<https://emea.socomec.com/en/reference/50230410>

Classification

UNSPSC	39121321
ETIM Class	EC001166
IGCC	4462

Commerce

Effective date	1999-01-01
Offer Life Cycle Code	40
Country of origin	FR

ETIM - Electrical characteristics

Number of poles	4
Max. rated current [A]	3200

ETIM - Mechanical characteristics

Busbar distance [mm]	123
----------------------	-----

Logistics

GTIN/EAN	3596031235308
Customs number	8547200000
Price unit	PC
Weight of the packing unit [kg]	1.09
Length of the packing unit [m]	0.04
Width of the packing unit [m]	0.15
Depth of the packing unit [m]	0.69

Norms

Conformity to standards	IEC
-------------------------	-----

Technical Characteristics

Height [mm]	560
Width [mm]	55
Depth [mm]	40
Weight [kg]	1.09
Busbar distance	123
Number of poles	4
Rated voltage	1000 Vac
Section	3x80