


54114040

TERMINAL DISTRIBUTION BLOCK FOR SIRCO 4 POLES 400 A

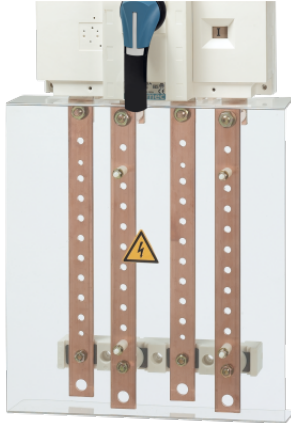

SOCOMEc distribution blocks make it easy to connect conductors. They are mounted downstream of a load break switch, a changeover switch, a fuse switch or any protection device on the market.

Strong points

- Extensive range
- Easy integration

General characteristics

- Lug connection.

Compliance with standards

- IEC 60947-3

Access to resources (ex: manuals)



<https://www.socomec.co.uk/en-gb/reference/54114040>

Environmental impact

Carbon footprint - Lifecycle total [kg CO ₂ eq.]	115
Carbon footprint - Manufacturing [A1-A3] [kg CO ₂ eq.]	19

Technical Characteristics

Number of conductors	9
Number of poles	4
Rated current [A]	400

Classification

UNSPSC	39121421
ETIM Class	EC000276
IGCC	4586

Commerce

Effective date	1993-08-05
Offer Life Cycle Code	40
Country of origin	FR

ETIM - Mechanical characteristics

Number of poles	4
With seal head	No

Logistics

GTIN/EAN	3596031347230
Customs number	8536901000
Price unit	PC
Weight of the packing unit [kg]	3.79
Length of the packing unit [m]	0.525
Width of the packing unit [m]	0.355
Depth of the packing unit [m]	0.05

Norms

Conformity to standards	IEC
-------------------------	-----